

UN-PEA1-21

Alarm Station (SOS)



- One-touch emergency calling
- High quality imaging with 2 MP built-in camera
- Real-time security via sound and voice detection
- Supports broadcasting
- Supports dual net ports
- Built-in SD slot supports MicroSD / SDHC / SDXC up to 128 GB
- Supports siren and audio expansion
- Manufacturing by ISO14001-2015, ISO9001:2015 Company


Specification

Model	UN-PEA1-21
Resolution	2Megapixel
Frame rate	25fps
Video Compression	H.265, H.264
Day/night switch mode	IR Cut Filter
Field angle	Horizontal: 128°, Vertical: 75°, Diagonal: 147°
Audio input	1-ch Built-in Omnidirectional Microphone, Pickup Distance: 5 m 1-ch 3.5 mm Audio Interface for External Audio Input
Audio output	1-ch 3 W Build-in Loudspeaker 1-ch 3.5 mm Audio Interface for External Audio Output
Audio compression	G.711u
Alarm	2 input, 2 output
Protocol	SIP; RTSP; RTP; TCP; UDP, PSTN
Network interface	1RJ45,10 M/100 M/1000 M self adaptive
Audio interface	1-ch Built-in Omnidirectional Microphone, Pickup Distance: 5 m 1-ch 3.5 mm Audio Interface for External Audio Input
SD card	Standard Micro SD card Slot, Supports Micro SD/SDHC/SDXC Card, Max. 128G
RS-485	1
Power supply	12VDC, PoE
Operation temperature	-40 °C to +60 °C (-40 °F to 140 °F)
Power consumption	≤ 24 W
Operation humidity	10% to 90%
Certification	CE, FCC
Ingress Protection	IP65, IK08



Panel Description

Panic Alarm Station

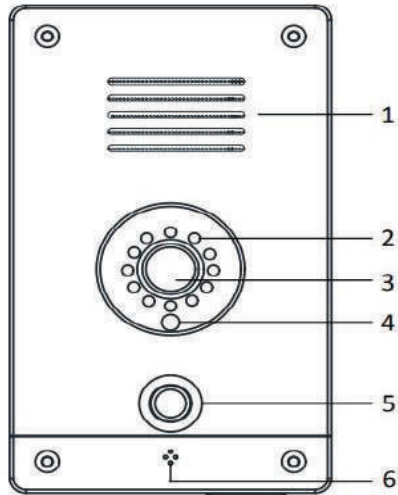

One-touch Panic Alarm Station

Panel Description

No.	Description
1	Loudspeaker
2	IR Light
3	Camera
4	Light Sensor
5	Panic Alarm Button
6	Microphone

